

# VE-724S

## CONVENTIONAL HOOTER



### OVERVIEW

VE-724S Elevate your fire safety measures with our cutting-edge conventional sounder system. That is used for audible, this dynamic device ensures comprehensive notification in case of fire emergencies. With its powerful sound output, it provides clear and unmistakable signals to occupants, facilitating swift evacuation and response. Engineered for reliability and ease of integration, our system offers peace of mind, safeguarding lives and property with unparalleled efficiency.



### FEATURES

- 24 Volt DC operation
- High Sound output
- ABS Plastic Body
- Wall mounted type
- Suitable for Mall, Bank, Hospitals, Restaurant etc.
- Suitable for sound polluted areas
- Low power consumption
- fully confirms IS: 2189





MECHANICAL SPECIFICATION	
Dimensions (MM)	100 X 70 X 50
Weight	150g (without Base)
Color	Red
Housing	Abs plastic
IP Ratings	IP24


ENVIRONMENTAL SPECIFICATION	
Temperature	-10°C to +70°C
Operating Humidity	max.95% RH (Relative Humidity)

ELECTRICAL SPECIFICATION	
Operating Voltage	22V DC to 24V DC
Standby current	0mA
Emergency operation Alarm	Approx. 130mA
Sound output	85db @ 1 meter

### APPROVALS



### WIRING DIAGRAM

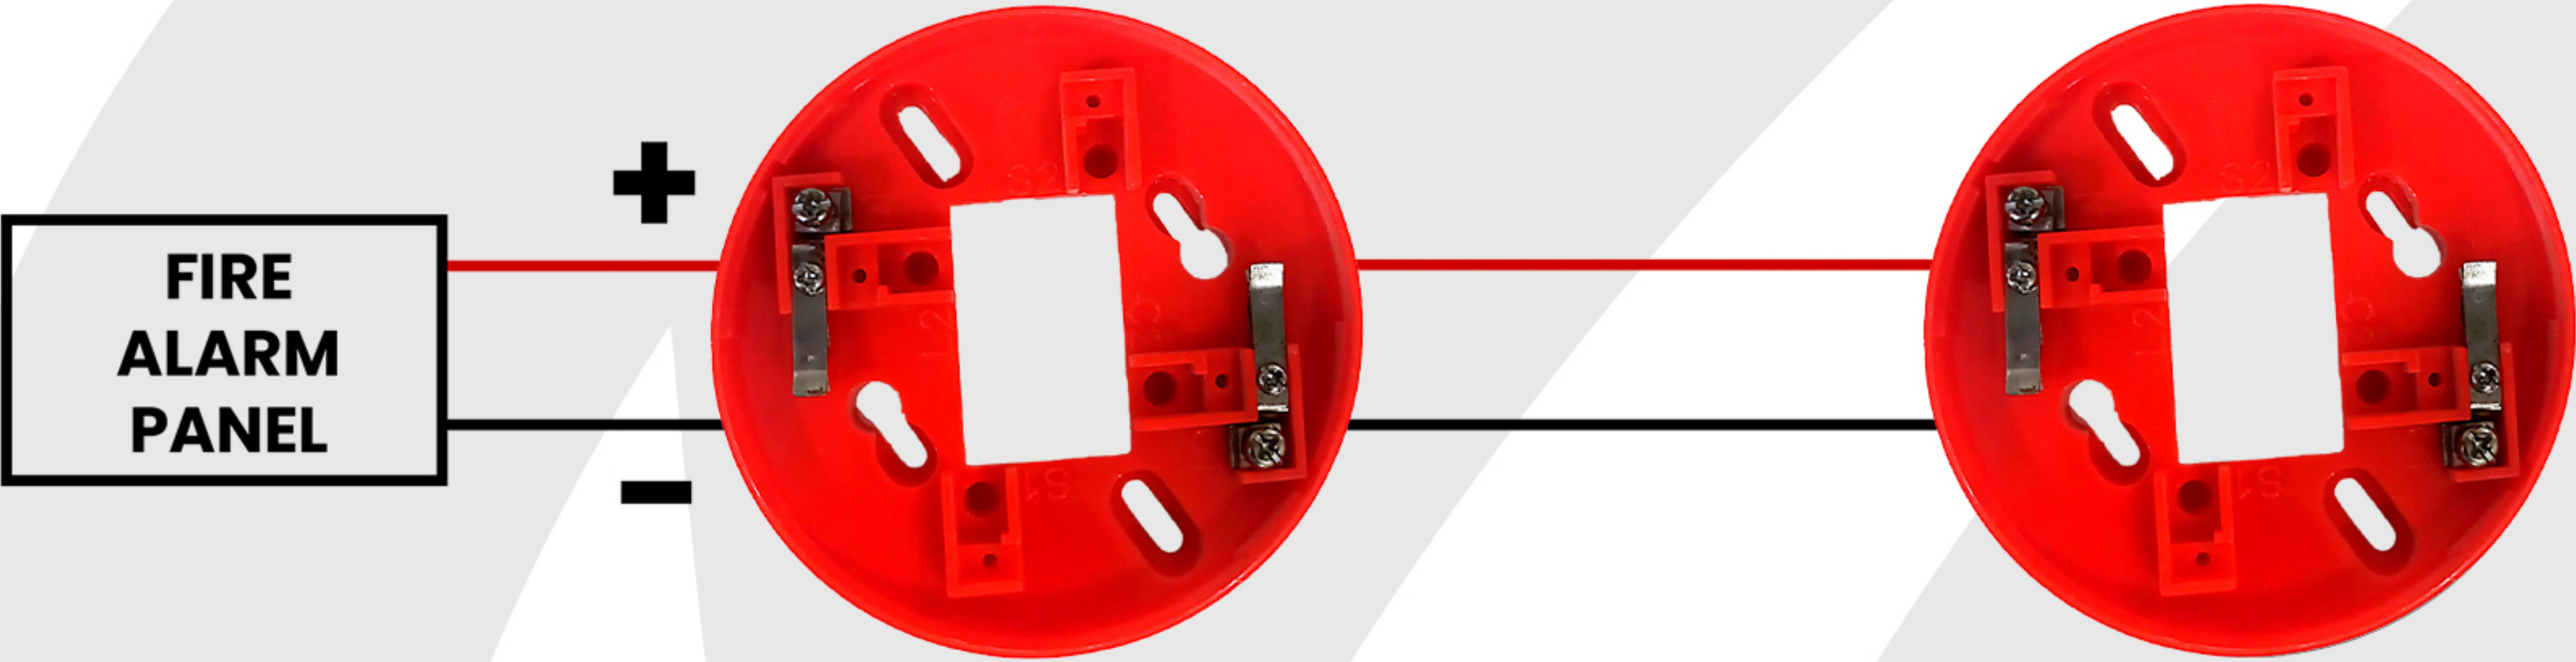

NOTE :  
 C1 - USED FOR BLACK (-)  
 L1 -USED FOR RED (+)

### Disclaimer

This document is just for a general overview & is not intended to be used for installation purpose. Data contained in documentation should be consulted with a fire-safety professional before specifying or using the product. All the specification are subject to change without prior notice.