


VE-824CM

ADDRESSABLE CONTROL MODULE



OVERVIEW

VE-824CM series addressable relay control module provides the system with a dry-contact output for activating variety of auxiliary devices, such as hooters, fans, door holders, dampers, control equipment, Air handling module etc. Addressability allows the dry contact to be activated through panel programming on selection basis. The Control module shall mount in a standard box, or to a customized mounted box.

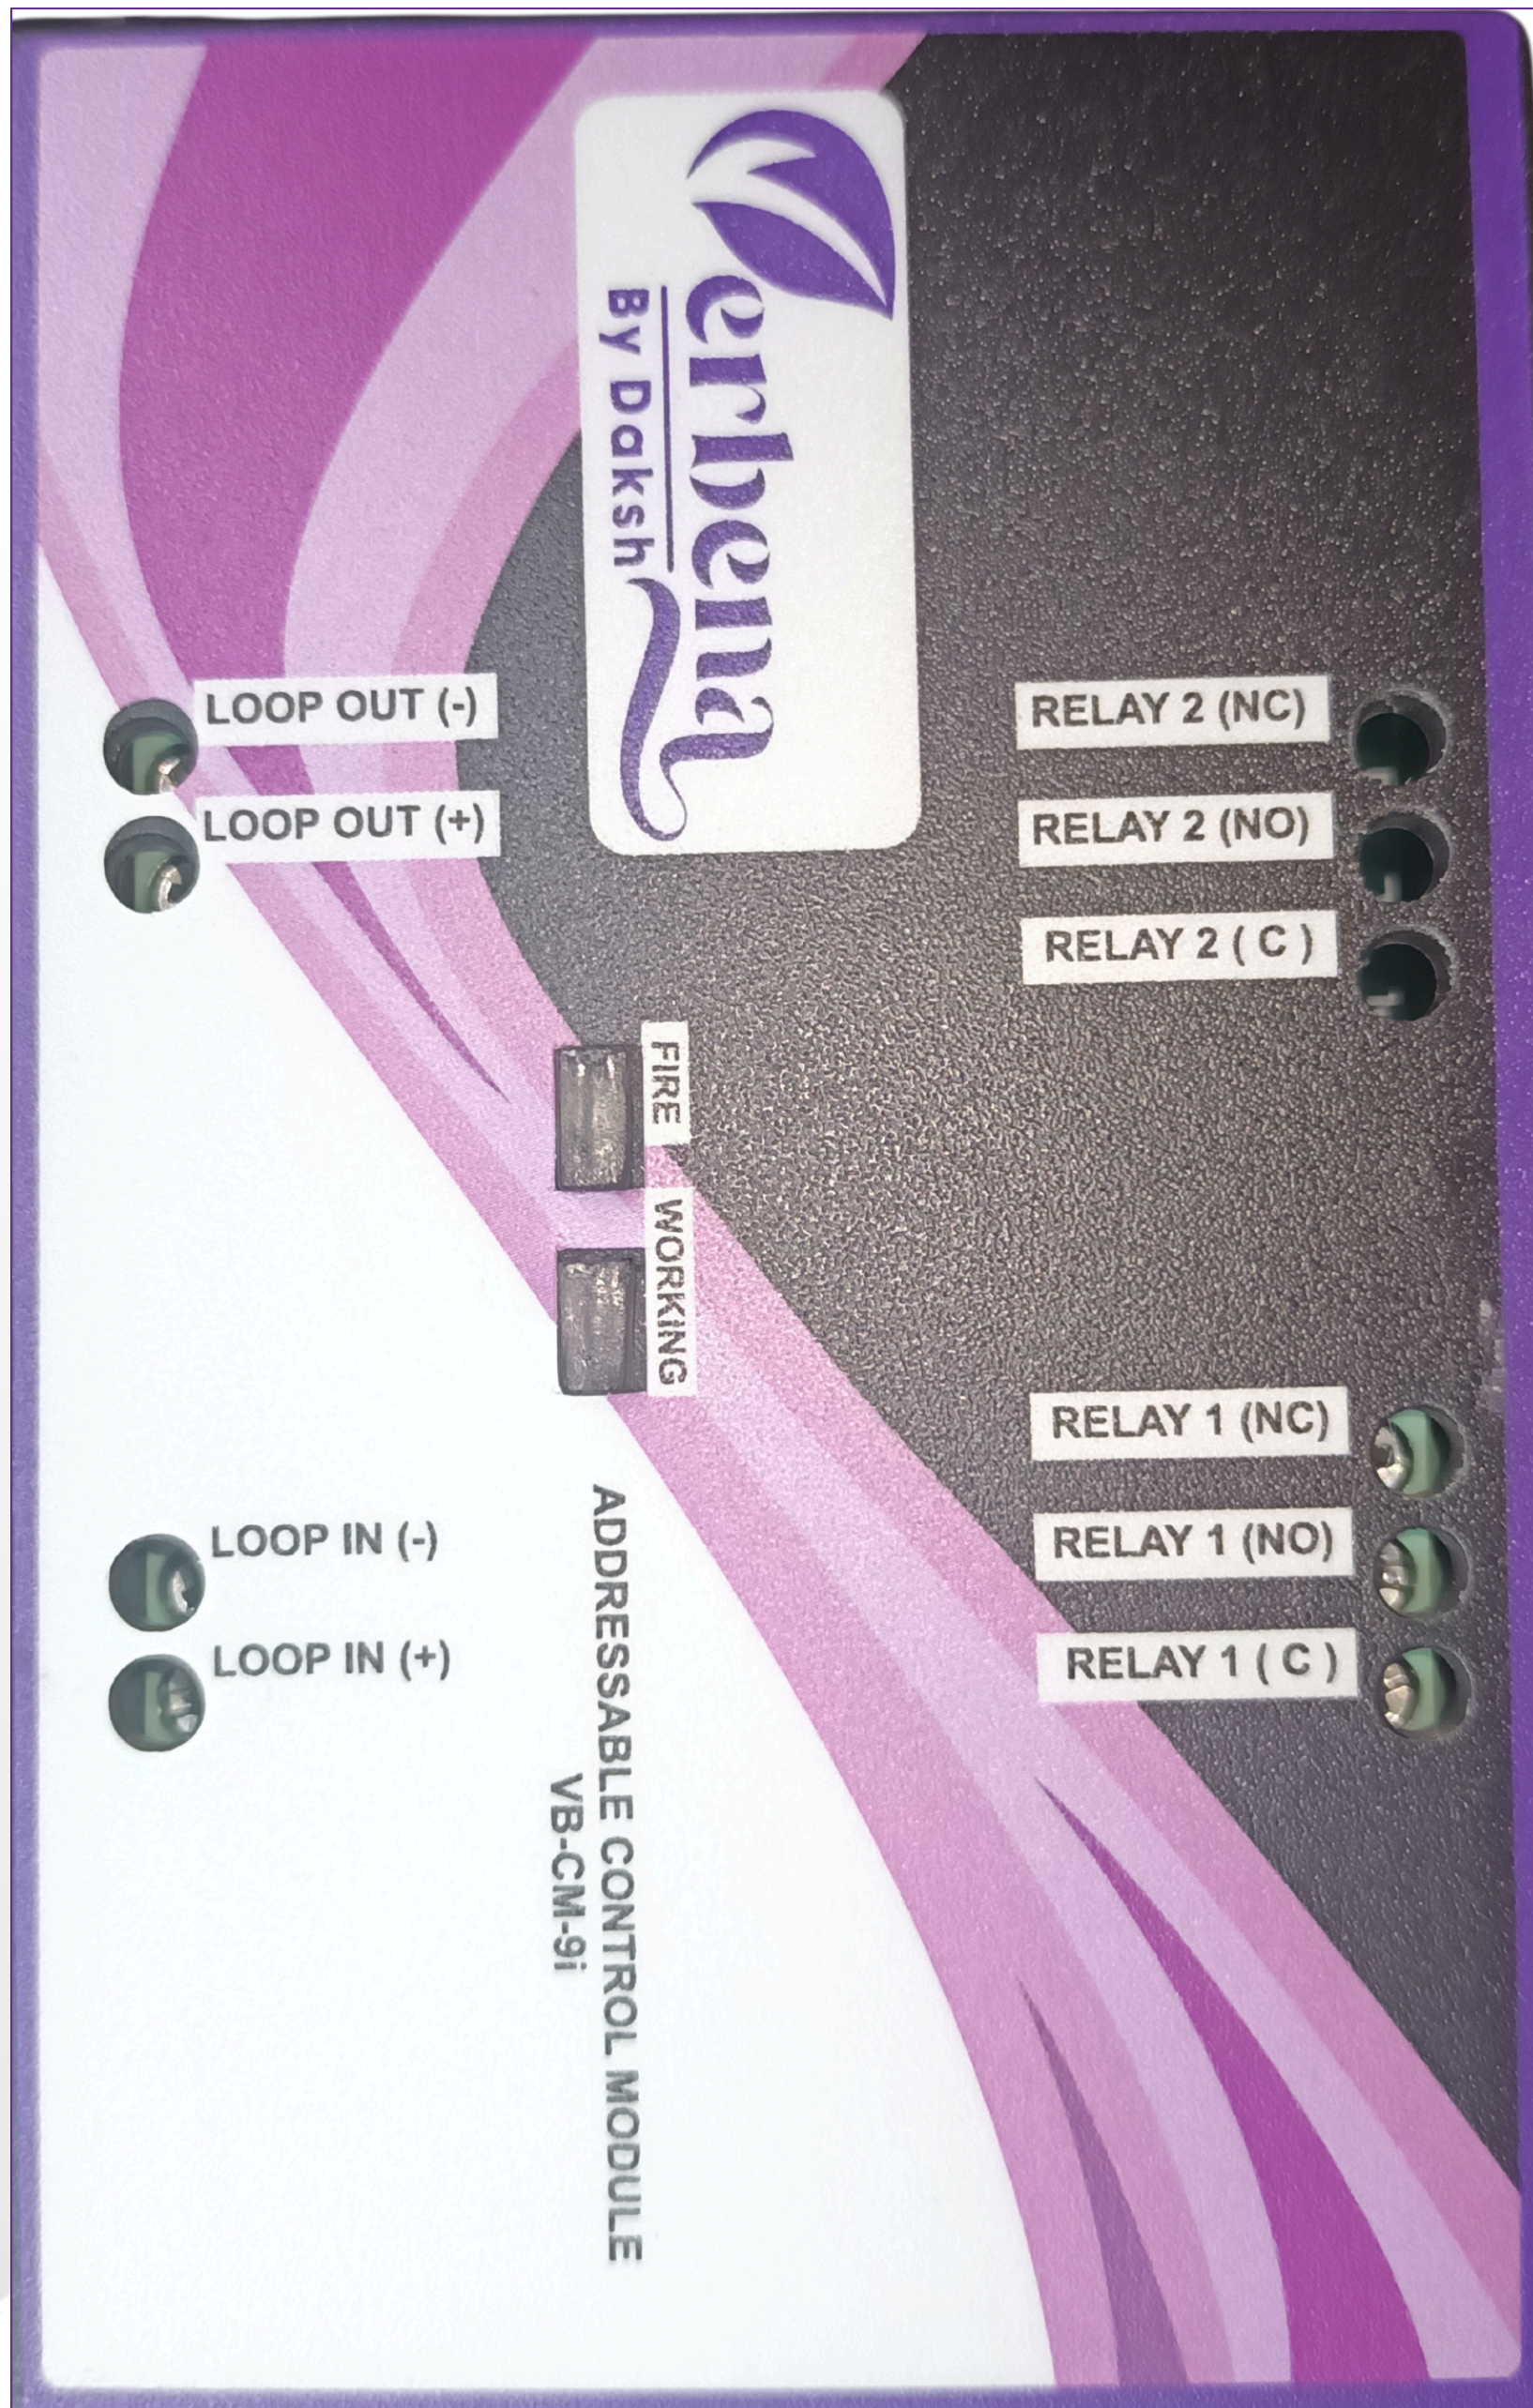

FEATURES

- Single or dual Output
- Surface mounting option
- Soft Addressing by Panel
- LED status visible for 360°C
- Low standby current
- Relay Automatically Reset when panel resets or in case of power failure


MECHANICAL SPECIFICATION	
Dimensions (MM)	146 X 121 X 33
Weight	110g
Colour	Black
Material	ABS Plastic

ELECTRICAL SPECIFICATION	
Operating Voltage	18 to 24V DC
Maximum SLC current draw	1mA
Average operating current	700µA
Relay Contact Ratings	1A 125VAC, 3A 30VDC

ENVIRONMENTAL SPECIFICATION	
Temperature Range	-10°C to +70°C
Humidity	≤ 95% Relative Humidity



WIRING DIAGRAM

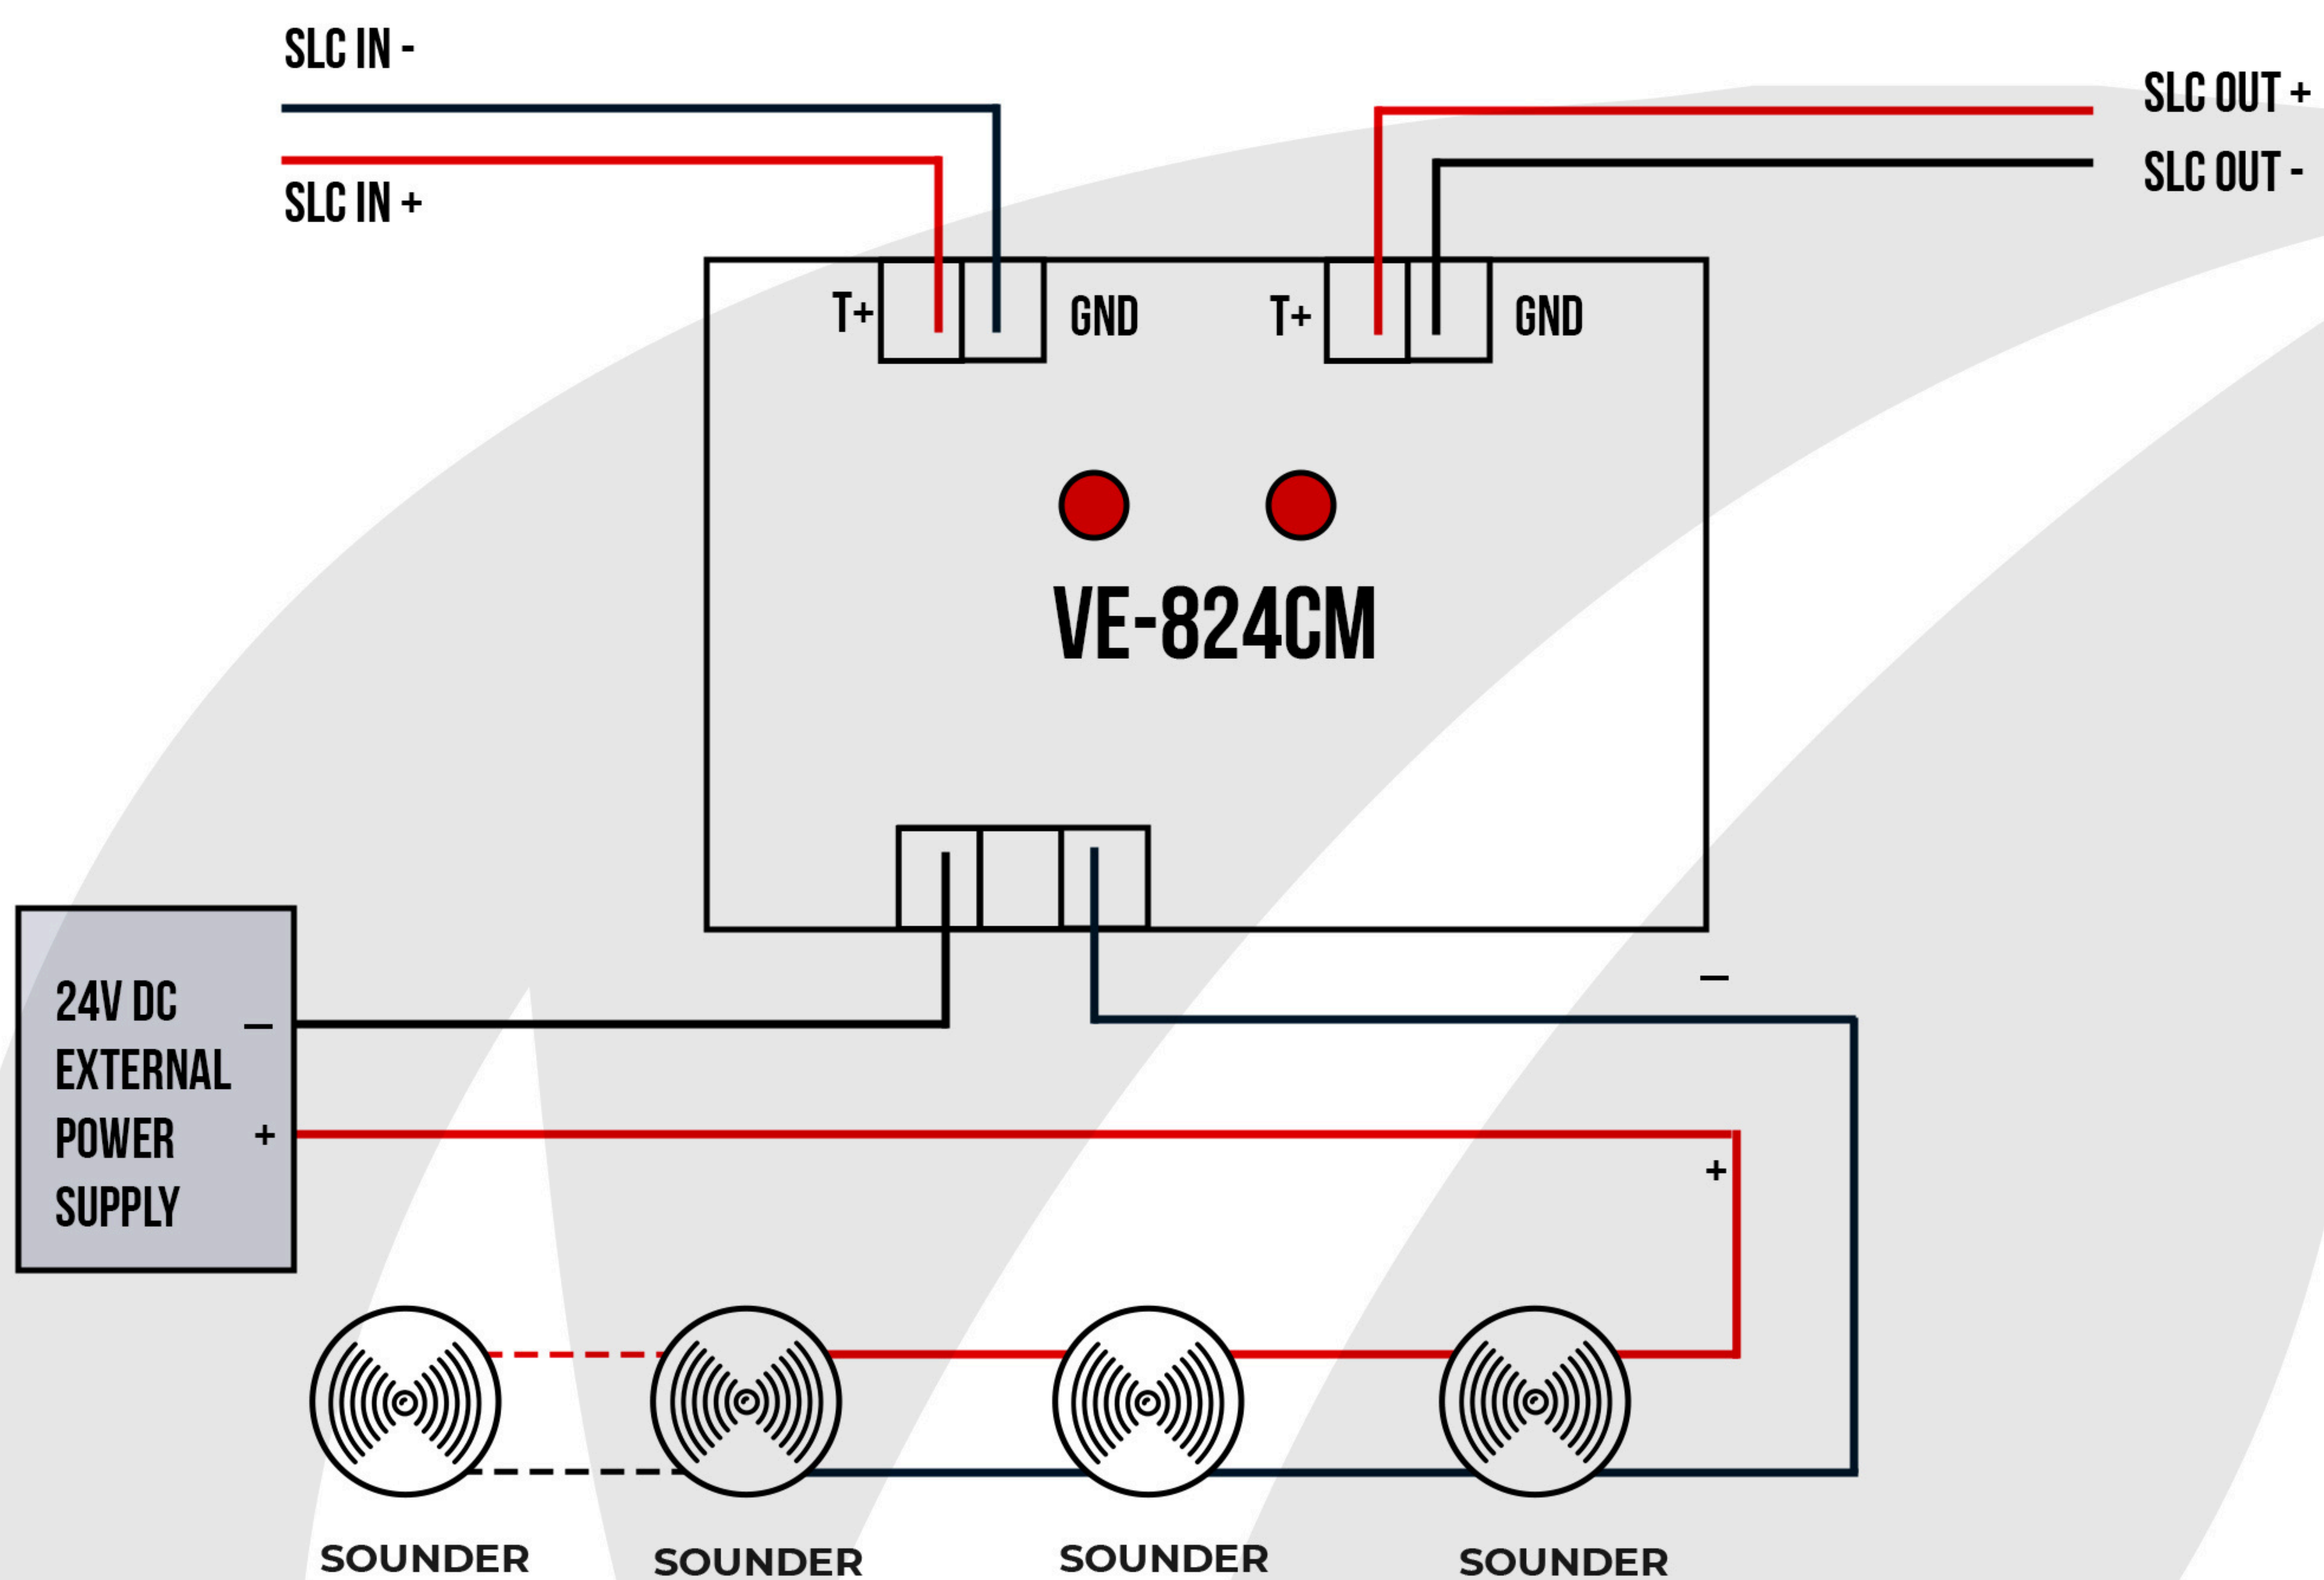

Disclaimer

This document is just for a general overview & is not intended to be used for installation purpose. Data contained in documentation should be consulted with a fire-safety professional before specifying or using the product. All the specification are subject to change without prior notice.